

Integration Solar Street Light

Product Specification

30-150W



Product Picture:



Features:

- * Plastic abs lamp body
- * No ac power cables, no electricity charges
- * LED lumen 160lm/w
- * IP65 rating

Applications:

- * Plazas, courtyards
- * Rural road lighting
- * Gardens, parks
- * Sporting venues

Product Parameter:

Model	0845A30-01	0845B60-01	0845C90-01	0845D120-01	0845E150-01
LED Type	60PCS 5730LED	120PCS 5730LED	180PCS 5730LED	240PCS 5730LED	300PCS 5730LED
Battery Type	LiFePO4 3.2V 12AH	LiFePO4 3.2V 18AH	LiFePO4 3.2V 24AH	LiFePO4 3.2V 30AH	LiFePO4 3.2V 36AH
Solar Panel Type	Polycrystalline 7W 6V	Polycrystalline 9W 6V	Polycrystalline 12W 6V	Polycrystalline 14.5W 6V	Polycrystalline 17.5W 6V
Color Temperature	3000K-6500K				
LED Lifespan	50000H				
Control Method	PIR Detection				
Operating Temperature	-20°C ~ 60°C				
Storage Temperature	-30°C ~ 70°C				
IP Rating	IP65				
Gross Weight/Carton	16.5KG	13KG	15KG	16KG	19KG
Product Size	230*65*400mm	240*65*530mm	250*65*645mm	255*70*760mm	255*70*850mm
Package Size	740*420*255mm 10Pcs/Box	550*375*265mm 5Pcs/Box	665*375*275mm 5Pcs/Box	770*305*275mm 4Pcs/Box	860*305*275mm 4Pcs/Box

Integration Solar Street Light

NELSON SOLAR

BP 6635 Ouagadougou CNT Ouaga

BURKINA FASO


WWW.NELSONSOLAR.COM



Operational Approach:

1. Press the switch once. The lamp flashes once and works at motion sensor mode;
2. Press again. The lamp flashes twice and works at constant brightness mode;
3. Long pressing the switch to turn off the lamp.

Lighting Data:

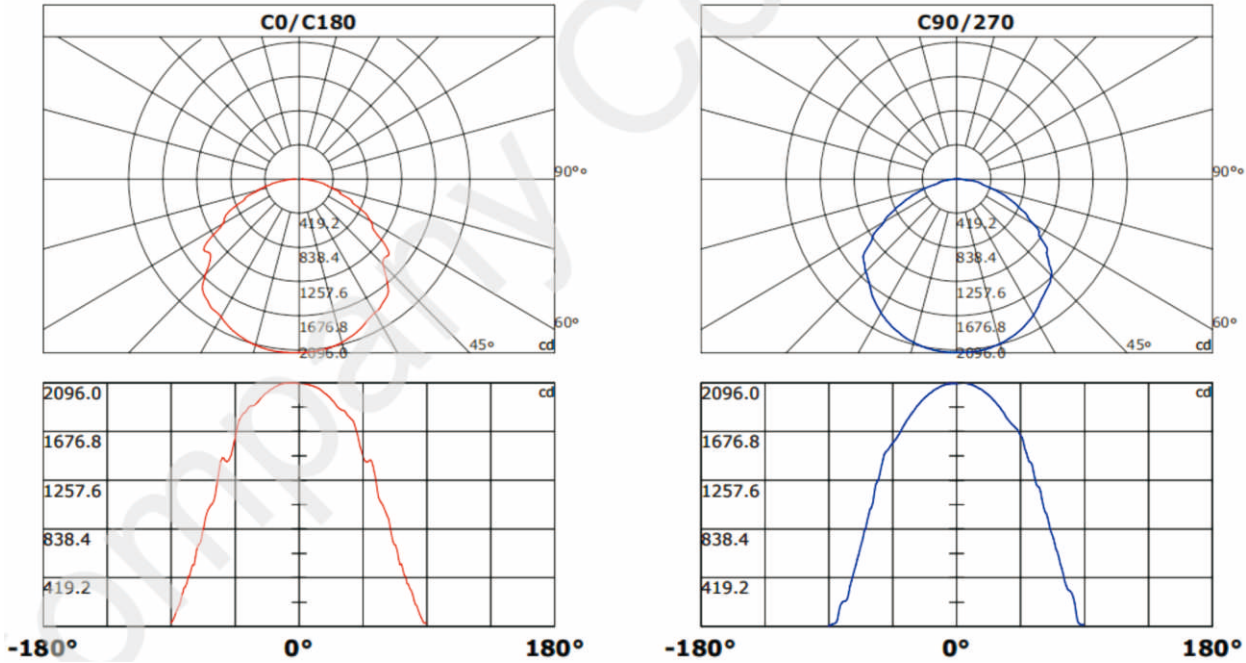

Installation Dimension:

